


Relief Valves

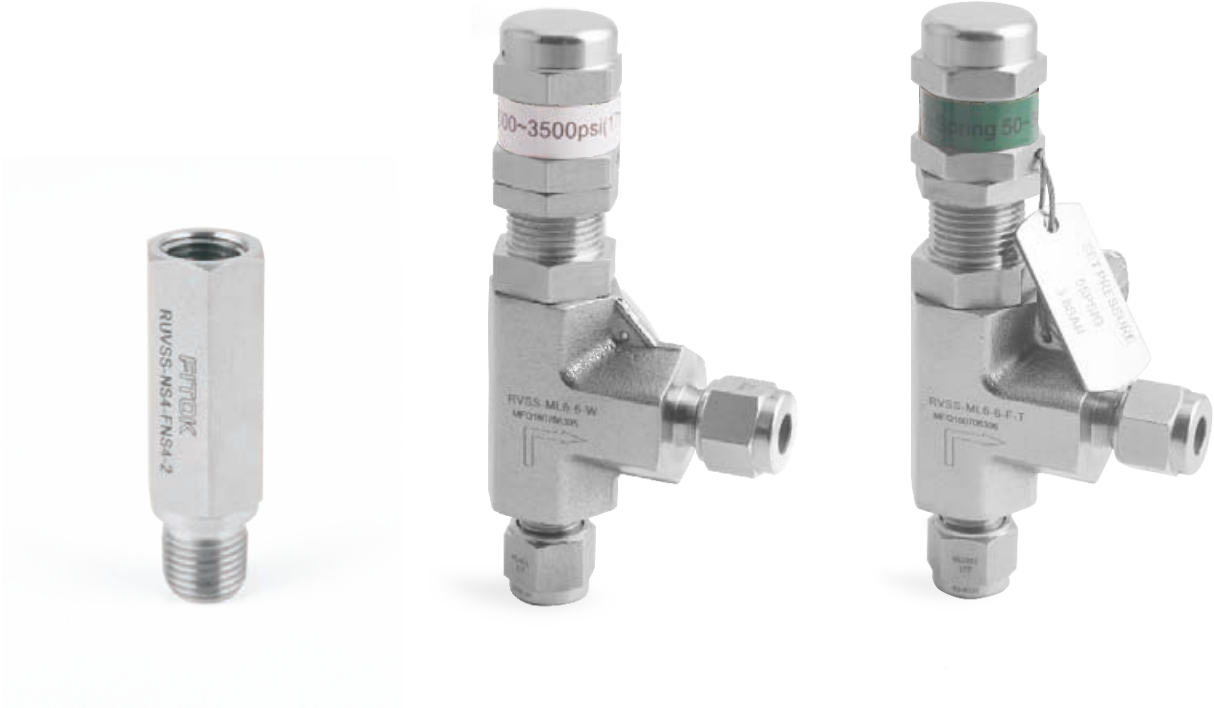

FITOK
Valves and Fittings

Relief Valves


RUV and RV Series

Introduction

Relief valve opens when system pressure exceeds the set pressure, allowing the medium to flow out to relieve the system pressure and closes when the system pressure decreases to the resealing pressure.


RUV Series

- ⦿ Compact design with one-piece body
- ⦿ Standard seat: FKM
- ⦿ Temperature: -10°F to 300°F (-23°C to 148°C)
- ⦿ Cracking pressure: 10 to 500 psig (1.7 to 34.5 bar)
- ⦿ Set pressure by nut adjustment and spring replacement

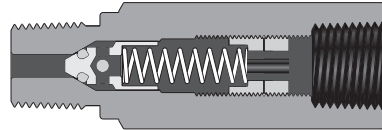

RV Series

- ⦿ Working temperature: -10°F to 300°F (-23°C to 148°C)
- ⦿ Cracking pressure: 50 to 6000 psig
- ⦿ Adjustable bonnet cap for pressure setting
- ⦿ Lead-seal line protected

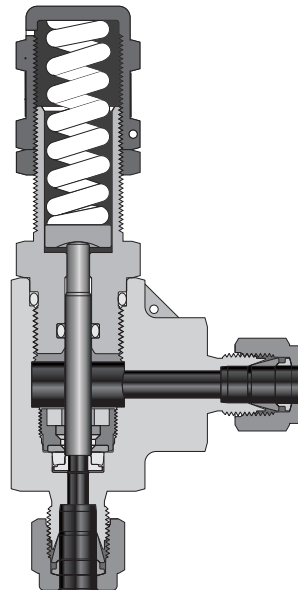

Temperature Range of Sealing Material

O-ring Material	Temperature Range °F (°C)
Fluorocarbon Rubber	25 to 250 (-4 to 121)
Buna-N Rubber	0 to 250 (-17 to 121)
Neoprene Rubber	-10 to 300 (-23 to 148)
Ethylene Propylene Rubber	30 to 250 (-1 to 121)

Part Number Description

RV		SS	- FNS		4	- NS		4	- 6		B	- 1		F2	
Series		Inlet Type		Outlet Type		Orifice Size		Set Pressure		Technology Grade					
RUV		FNS Female NPT		Same as Inlet Type		0.14" (3.6 mm) (only for RUV Series)		0 10 to 25 psig		General Purpose					
RV		NS Male NPT		Specify in the same way as inlet type		0.14" (3.6 mm) (only for RV Series)		1 25 to 100 psig		F2 Special Cleaning and Packaging					
Body Material		FL Fractional Tube Fitting (only for RV Series)		Outlet Size		Seal Material		2 100 to 250 psig		RV					
6L	316L SS	ML Metric Tube Fitting (only for RV Series)		Same as Inlet Size		FKM		3 250 to 500 psig		RV					
Inlet Size		4 1/4"		Specify in the same way as inlet size		B Buna-N		F 50 to 300 psig		RV					
6 6 mm or 3/8"		6 6 mm or 3/8"				N Neoprene		O 300 to 700 psig		RV					
8 8 mm or 1/2"		8 8 mm or 1/2"				E Ethylene Propylene		Y 700 to 1500 psig		RV					
						Z Kalrez		P 1500 to 2500 psig		RV					
								W 2500 to 3500 psig		RV					
								J 3500 to 4500 psig		RV					
								C 4500 to 6000 psig		RV					

FITOK Group

FITOK GmbH (Headquarter)

Sprendlinger Landstr. 115, 63069 Offenbach am Main, Germany
Tel.: +49 69 8900 4498 Fax: +49 69 8900 4495

FITOK, Inc.

13843 North Promenade Blvd., Suite 750, Stafford, Texas 77477, USA
Tel.: +1 281 888 0077 Fax: +1 281 582 4051

FITOK Incorporated

Block C, Zone E, Yingtai Industrial Park, Dalang Street,
Longhua New District, Shenzhen, 518109, China
Tel.: +86 755 2803 2500 Fax: +86 755 2803 2619

FITOK Middle East Oil Equipment Trading LLC

208-209, Makateb Building, Airport Road, P.O.Box 185412, Deira, Dubai, UAE
Tel.: +971 4 2959 853 Fax: +971 4 2959 854

info@fitokgroup.com
www.fitokgroup.com

FK-IC-S-01-V-06-EN-161221